

JIT Drill

High Production... Heavy Duty... American Parts

SPECIFICATIONS

- Drill Heads & Stops are fastened by hydraulic locks or cams
- Electro-magnetic are used for back stops and these are quickly energized using toggle switches
- Flexible Shafts allow maximum drill head movement without having to move drill motors
- Cam Action End Stop for quick setting of one stop
- Flex Shafts support drill heads for less movement during setup
- Drill Motors (4x) 1HP, 1750RPM, TEFC, 220V/460V,3PH, Hyd. Pump motor - 2HP,230V/460V,3PH
- Table Dimensions: 13" x 72" standard, 144" max
- 2" Standard minimum centerline (custom heads available down to 1" centerline)
- Standard features: Cam end stops, Cam clamps, spring hold downs (2x), Rear stop magnets (2x)
- Optional features: hydraulic clamps, multi-spindle heads, custom table size, extra heads (12x max)
- Aluminum-Bronze slides with polyurethane guide wheels for long, accurate slide life
- Rack and pinion leveling for smooth vertical travel

Simple Design, Low Cost, High Performance


Just like our other equipment

High Production...

Fast Setup (4 minutes rather than 20)

Off-The-Shelf Parts

So you can keep it running years from now

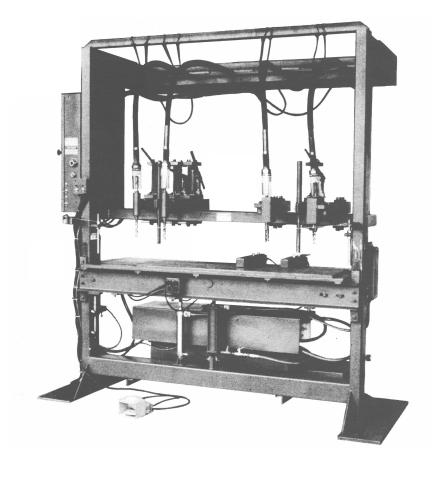

ANOTHER HIGH PRODUCTION WOODWORKING MACHINE BY LHI - BUILDERS OF SIMPLE, TOUGH MACHINES FOR 40 YEARS

Designed and Manufactured by Lauderdale-Hamilton, Inc.

732 Romie Hill Avenue • Box 165, Shannon, MS 38868 • Phone 662-767-3928 • Fax 662-767-3047 • sales@lauderdale-hamilton.com